

Round head screws 4PCS
Ceiling plate IPCS




Wiring caps 3PCS



Ties 3PCS



Gloves IPCS

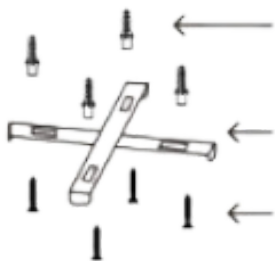


Expansion tubes 4PCS


Cross-hanging plate IPCS

Self-tapping screws 4PCS

①




Ceiling



Impact Drill

Expansion tubes




Ceiling



Hammer



1. First take the cross-hanging plate and mark the holes for the self-tapping screws on the ceiling and punch them. Then use a hammer to hammer the expansion tube into the ceiling.

②



2. Fix the pegboard inside the expansion tube of the ceiling with self-tapping screws and lock the across pegboard tightly with a screwdriver.

③

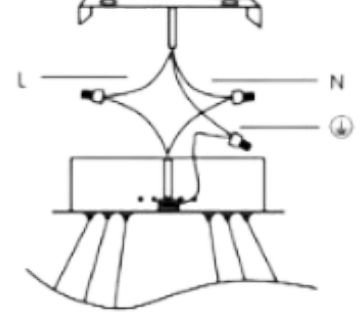

3. Connect the wires in the ceiling and the lamps with zero wire and zero wire, fire wire and fire wire earth wire and earth wire, respectively, and then tighten the wires with wiring caps and tie them with ties.

④



Ceiling



Expansion tubes



Divided head




Zip head




Steel wire

⑤

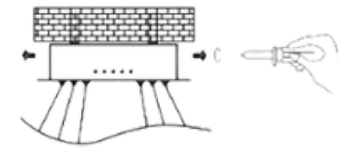

5. Place the ceiling plate against the ceiling, align the side holes of the suction prep plate with holes of the cross peg plate, screw the round head screws into the screw holes of the peg plate with a screwdriver and lock them in place.

⑥

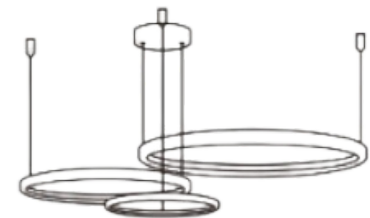

6. Installation is complete and the light can be illuminated

NOTES:

1. Before installation, please check that the parts are complete and that the luminaire is intact
2. Disconnect the power supply before installation and carry out wiring
3. When installing the light bulb, use a light bulb with a wattage lower than that shown on the light head label.
4. Installation and maintenance must be carried out by a professional technician